

FlexPoint® OC12FF OC-12/STM-4 Fiber-to-Fiber Converter/Transponder

The FlexPoint OC12FF is a OC-12/STM-4 fiber-to-fiber converter/transponder that provides reliable and cost-effective extension of network distances by connecting multimode fiber networks or devices over single-mode fiber cabling.

No manual configuration is required with the plug-and-play FlexPoint OC12FF. Connect the fiber cables to the appropriate interface and the installation is complete.

Depending on the model, the fiber port operates at 1310nm or 1550nm and features SC connectors. Multimode fiber models support distances of up to 550m, and single-mode fiber models support distances of up to 80km.

The FlexPoint OC12FF features descriptions of the LED indicators on the label for easy in-the-field installation and maintenance. The LEDs report the availability of power and the detection of devices attached to the fiber ports.

FlexPoint modules can be mounted utilizing optional wall-mounting hardware or with DIN-rail mounting brackets. They can also be rack-mounted in a 5-Module shelf or in a high-density 14-Module, power-redundant Powered Chassis.

FlexPoint modules installed in the 5-Module shelf or used as standalone devices can be powered by an external AC to DC power adapter, or through the 5VDC chassis connector. Standalone modules can also be powered by attaching an external DC power supply (18-60VDC). When used in the 14-Module power-redundant Powered Chassis with any combination of AC and DC power supplies, the installed modules are powered via the 5VDC chassis connector.

The wide variety of FlexPoint mounting and power options provide flexible upgrade paths as network requirements change and grow.

FlexPoint unmanaged media converters are easy to use and provide dependable fiber connectivity in Enterprise and Government networks around the world.



KEY FEATURES

- Fiber-to-Fiber Converter/Transponder supporting:
 - Multimode dual fiber to single-mode dual fiber
 - Wavelength conversion
- Support for OC12 over ATM or SONET
- Supports multimode and single-mode dual fiber with SC connectors
- Plug-and-play installation requires no manual configuration or software drivers
- Supports auto-negotiation of duplex mode
- Extends network distances up to 80km
- Labeled status LEDs for quick and easy installation
- Wall-mount or rack-mount on a 5-Module shelf or in a 14-Module power-redundant FlexPoint Powered Chassis
- TAA, BAA and NDAA compliant, and Made in the USA
- Peace-of mind reliability backed by a lifetime warranty and free 24/7 technical support


SPECIFICATIONS

Description	FlexPoint OC12FF Fiber-to-Fiber Converter/Transponder		
Standard Compliances	SONET OC-12, SDH STM-4		
Regulatory Compliances	Safety:	UL, cUL, CE, UKCA	
	EMI:	FCC Class A	
	ACT:	TAA, BAA, NDAA	
Environmental	RoHS, WEEE, REACH		
Frame Size	Supports unlimited frame sizes		
Port Type	Fiber:	OC-12 (SC)	
Cable Type	Fiber:	Multimode: 50/125µm, 62.5/125µm Single-mode: 9/125µm	
AC Power Requirements	AC Adapter:	100 - 240VAC/50 - 60Hz 0.04A @ 120VAC (typical)	
DC Power Requirements	Voltage Range: Nominal Voltage: Nominal Power:	Barrel Connector	Molex Connector
		6.0 to 15.0VDC 9VDC 0.2A @ 9VDC	4.75 to 5.25VDC 5VDC 0.5A @ 5VDC
Dimensions W x D x H	3.0" x 4.0" x 1.0" (76.2 mm x 101.6 mm x 25.4 mm)		
Weight	Without AC Adapter:	6 oz. (170.1 grams)	
Temperature	Commercial:	0 to 50°C	
	Storage:	-40 to 80°C	
Humidity	5 to 95% (non-condensing)		
Altitude	-100m to 4,000m		
MTBF (hrs)	Without AC Adapter (-0):	2,600,000	
	With AC Adapter (-1):	250,000	
	With AC Adapter (-2):	100,000	
Warranty	Lifetime warranty with 24/7/365 free Technical Support		



APPLICATION EXAMPLE

The FlexPoint OC12FF fiber converter can extend the network across single-mode fiber with distances up to 80km. In this application, the customer's router is connected to an Add Drop Multiplexer (ADM) providing access to the SONET ring using a pair of FlexPoint OC12FF fiber converters. The converters provide the multimode to single-mode conversion.

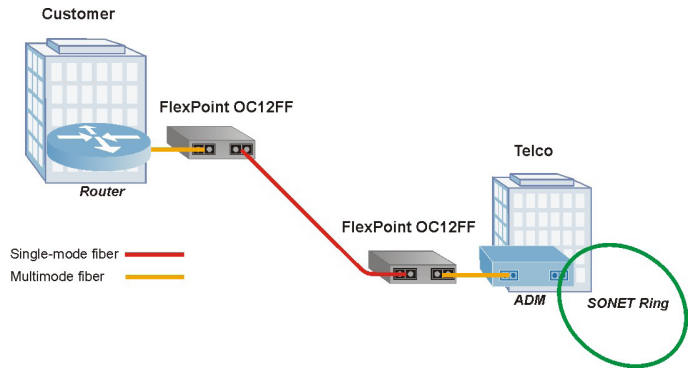

ORDERING INFORMATION

Step 1: Choose a Base Part Number (xxxx-p)

Port	Fiber Type	Distance	Connector Type	Tx / Rx Lambda (nm)	Min. Tx Power (dBm)	Max. Tx Power (dBm)	Min. Rx Power (dBm)	Max. Rx Power (dBm)	Min. Attenuation (dB)	Link Budget (dB)
			SC							
Port 1	MM/DF	550m	4461-p	1310 / 1310	-20	-14	-26	-14	-	6
Port 2	SM/DF	12km		1310 / 1310	-9.5	-3	-19.5	-3	-	10
Port 1	MM/DF	550m	4463-p	1310 / 1310	-20	-14	-26	-14	-	6
Port 2	SM/DF	34km		1310 / 1310	-5	0	-23	-3	3	18
Port 1	MM/DF	550m	4469-p	1310 / 1310	-20	-14	-26	-14	-	6
Port 2	SM/DF	80km		1550 / 1550	-5	0	-26	-3	3	18

MM = Multimode, SM = Single-mode, DF = Dual Fiber

Contact Omnitron for other fiber options, operational temperature ranges and RoHS (5/6) compliant models.

Step 2: Choose a Power Option (xxxx-p)

-0 = Barrel Connector, No AC/DC Power Adapter
-1 = Barrel Connector and US AC/DC Power Adapter, 100-240 VAC, 50-60Hz
-2 = Barrel Connector and Universal AC/DC Power Adapter, 100-240VAC, 50-60Hz (requires AC power cord)

Operating Temperature

Commercial temperature (0 to 50°C)

The new 446xN-x models have a different multimode optical specification than the previous models.



-1 = Barrel Connector and US AC/DC Power Adapter, 100-240 VAC, 50-60Hz



-2 = Barrel Connector and Universal AC/DC Power Adapter, 100-240VAC, 50-60Hz (requires AC power cord)

ACCESSORIES

Model Number	Description	Model Number	Description
4380	Wall-Mounting Hardware Kit for Modules	4381	Wall-Mounting Hardware Kit for DC to DC Power Adapter
4384	DC to DC Power Adapter	4384-W	DC to DC Power Adapter, Wide Temperature (-40 to 60°C)
4385	14-Module Chassis with two 48VDC Power Supplies	4386	14-Module Chassis with one 48VDC Power Supply
4389	Spare 48VDC Power Supply	4392	5-Module Rack-Mount Shelf
4395	14-Module Chassis with two AC Power Supplies	4396	14-Module Chassis with one AC Power Supply
4399	Spare AC Power Supply	8250	DIN-Rail Mounting Kit

See all FlexPoint accessories on [FlexPoint Chassis and Mounting Options product page](#)

© 2024 Omnitron Systems Technology, Inc. All rights reserved. FlexPoint is a registered trademark of Omnitron Systems Technology, Inc. Trademarks are owned by their respective companies. Specifications are subject to change without notice.

