

### **iConverter 2FXM**

#### **100BASE-FX SFP to 100BASE-FX SFP Media Converter and Network Interface Device**

The *iConverter*® 2FXM2 conforms to the Ethernet in the First Mile (EFM) standards to support Fiber-to-the-X Metropolitan and Enterprise LAN networks. The 2FXM2 provides intelligent, securely managed service demarcation at the customer premises, offering Quality of Service and Bandwidth Control (rate-limiting) capabilities. The 2FXM2 features built-in Operations, Administration and Maintenance (OAM) management with comprehensive monitoring, fault detection and provisioning.

The 2FXM2 is available as a compact standalone unit or as a chassis plug-in module. The hot-swappable 2FXM2 plug-in module can be mounted in a 19 or 5-Module chassis with any combination of redundant AC and DC power supplies. It can also be mounted in a 2-Module AC or DC powered chassis, or in a 1-Module chassis with AC or DC power input.

The plug-in module can manage other modules in the same chassis and operate as a managed fiber-to-fiber media converter. It features two Ethernet backplane ports for connectivity to adjacent modules in a chassis for multi-port and multi-service configurations.

The standalone 2FXM2 is available as a tabletop or wall-mount unit. The tabletop model can be DIN-rail mounted using an optional DIN-rail mounting kit. Both the tabletop and the wall-mount models are DC powered and are available with an external AC/DC power adapter or a terminal connector for DC power. The 2FXM2 standalone unit combines management capability with a compact chassis for deployment at the demarcation point.

*iConverter* 2FXM modules are not supported in future software releases and are not recommended for new designs or deployments.



### **KEY FEATURES**

- Carrier-Grade optical Ethernet Network Interface Device
- Integrated SNMPv1, SNMPv2c, SNMPv3 and IP-less 802.3ah management
- 802.3ah Link OAM for performance monitoring, early fault detection and dying-gasp
- VLAN with 802.1ad Q-in-Q for E-Line and E-LAN services
- Quality of Service for Voice/Data/Video over Ethernet
- Bandwidth control (rate limiting) with 64Kb increments
- Port MIB statistics and optical performance statistics to support Service Level Agreements
- Port Access Control for enhanced security
- 2,048 byte Jumbo frames
- Layer 2 Control Protocol (L2CP) Policy Control
- Configurable Link Fault Propagation modes
- Small Form Pluggable (SFP) transceivers with Optical Statistics for standard or CWDM applications
- Commercial (0 to 50°C), wide (-40° to 60°C) and extended (-40° to 75°C) temperature ranges
- MEF 9 and 14 Certified and NEBS Level 3 Compliant
- Lifetime Warranty and free 24/7 Technical Support

### **CARRIER-GRADE OPTICAL ETHERNET**



*iConverter* fiber access Network Interface Devices and media converters are MEF 9 and 14 certified compliant and NEBS Level 3 compliant. *iConverter* NIDs enable Carrier-Grade Optical Ethernet with reliability and performance monitoring to support Service Level Agreements (SLAs).



The modular design of *iConverter* fiber access equipment future-proofs Metro Ethernet services with scalability of network services, and lowers operating costs with comprehensive OAM management and provisioning.

## ADVANCED FEATURES

### Fiber Port Options

The 2FXM2 Small Form Pluggable (SFP) model supports a wide variety of SFP transceivers for FTTX and CWDM applications. SFP fiber transceivers are available with multimode (MM) dual fiber, single-mode (SM) dual fiber and single-mode single-fiber (SF) options. They support LC connectors with distances up to 5km over MM fiber, 120km over SM fiber and 50km over SF. SFP transceivers are available in 20nm increments from 1270nm to 1610nm.

### Link Modes

The 2FXM2 features multiple, user-selectable link fault detection modes, including Link Fault Propagation, Remote Fault Detection and Asymmetrical Fault Detection. These Link Modes provide rapid fault detection and isolation by monitoring the state of the cabling hardware, and operate independently of the network management.

### Tag VLAN, Port VLAN and QoS

The *iConverter* 2FXM2 supports the IEEE 802.1Q Virtual Local Area Network (VLAN) packet tagging and untagging (including Q-in-Q) and the 802.1p Quality of Service priority standards.

2FXM2 VLAN 802.1ad tunneling technology enables service providers to offer their customers E-Line and E-LAN services (via Ethernet Virtual Circuit or EVC), which connect multiple business LANs at different locations and make their networks appear to be on the same local network. Q-in-Q Service tags transparently transport customer network traffic across the service provider network, isolating it from other customer and service provider management traffic.

2FXM2 Port VLAN enables the ability to specify and restrict traffic flow between the fiber, backplane and management ports.

The 802.1p prioritization standard enables delivery of Quality of Service (QoS) to high-priority, real-time applications such as voice and video over Ethernet.

### Port Bandwidth Control and Port Access Control

The enhanced Bandwidth Control feature supports levels of bandwidth between the fiber ports in 64Kbps increments from 64K to Full Line Speed.

The 2FXM2 features Port Access Control which blocks user service while maintaining the network link. Port Access Control enables the service provider to control user access while maintaining port configuration for easy disabling or enabling of customer service. Port Access Control provides enterprise administrators the capability to improve network security by controlling port access when the port is not in use.

### Port Statistics and Optical Performance Statistics

The 2FXM2 supports reporting of utilization, port and optical performance statistics. Port statistics are available for 38 different variables for the fiber ports. Additionally, full optical performance statistics are available on SFP fiber transceivers with a digital diagnostic bus.

Port and optical performance statistics reporting provides the ability to monitor customer bandwidth utilization, network performance and the link signal quality for each individual port.

### IEEE 802.3ah Operations, Administration and Maintenance

The 2FXM2 supports the IEEE 802.3ah OAM standard, including Fault Detection, Performance Monitoring, Unidirectional Fault Detection and Remote Loopback.

#### Fault Detection

The 2FXM2 detects and indicates link failures, dying gasp and other critical events. The 2FXM2 also supports Unidirectional Link Fault Detection that indicates faults in either direction of the fiber link.


#### Performance Monitoring

802.3ah Performance Monitoring tools are used for the detection and notification of link performance (quality) faults. Ethernet data performance can deteriorate slowly before disrupting service, and the 2FXM2 allows the setting of error-per-second thresholds. Once the pre-set error threshold is exceeded, an event notification is generated that provides early indication of a problem that may be resolved prior to loss of service.

#### Remote Loopback

Remote Loopback is used for fault localization and link performance testing. When a 2FXM2 port is in loopback mode, all received service traffic is looped back and transmitted back unaltered. The statistics from the 2FXM2 port and the remote link partner can be compared for consistency.

## METRO ETHERNET ACCESS

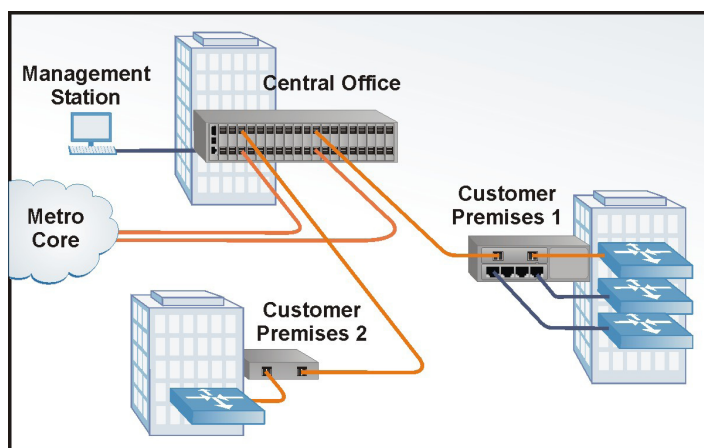

At the Central Office, an *iConverter* 2FXM2 plug-in module is installed in a managed *iConverter* 19-Module chassis providing high-density fiber access. At Customer Premises 1, the 2FXM2 plug-in module is installed in a 2-Module chassis with an *iConverter* 4TxVT four-port switch module. The two modules share data via the Ethernet Backplane. This configuration functions as a remotely managed demarcation switch with a fiber uplink port to the Central Office and four copper ports that drop off Ethernet service. At Customer Premises 2, the 2FXM2 standalone NID provides a fiber uplink for intelligent demarcation of Ethernet services.

# MANAGEMENT SYSTEM

The 2FXM2 has integrated management, eliminating the cost and space required for external management hardware. The *iConverter* management system provides comprehensive remote configuration and performance monitoring. *iConverter* management reduces operational expenditures by keeping truck rolls to a minimum through remote provisioning, trap notification and loopback capabilities.

*iConverter* management is available out-of-band via IP-Less protocol using the 802.3ah OAM channel or Omnitron's Secure OAM channel, or in-band using SNMP or Telnet.


Management is accessed via Omnitron's *NetOutlook*® SNMP Network Management Software with an intuitive Graphical User Interface, or third party SNMP software. Telnet and CLI management interfaces are also supported, and utilize an easy to use, menu-driven interface. The CLI interface is accessed via a Serial Console Port, that provides local configuration and allows for firmware updates. Additionally, the port can be connected to a serial modem to provide an alternative remote management path.

## IP-Based Management

The 2FXM2 can be managed through IP protocols, SNMPv1, SNMPv2c, SNMPv3 and Telnet. The IP address of the 2FXM2 can be user-defined or resolved through the DHCP host on the network. The IP protocols for management access can be enabled or disabled individually or as a group. Access to the management is protected by password authentication. SMNPv3 strengthens secure access to devices by a combination of authenticating and encrypting packets over the network. Management VLAN can also be defined to separate management traffic from customer traffic.

## 802.3ah and Secure OAM Management Channels

When utilizing a Remote OAM management channel (Secure IP-less or 802.3ah), the NID at the Customer Premises is securely managed by its fiber link partner located at the Central Office or Point of Presence. The management network IP address is not available to the customer network and is isolated by the *iConverter* Network Management Module (NMM) in the 19-Module Chassis at the Central Office.

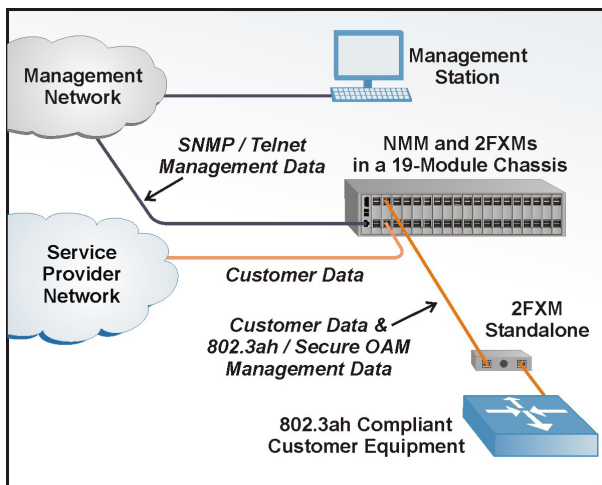

A management processor on the *iConverter* 2FXM2 fiber-to-fiber media converter installed in the 19-Module Chassis isolates the encrypted management data from the customer data and communicates with the NMM via a separate management backplane bus. Management traffic on the user data lines is IP-less and carried on a securely encrypted data channel to protect the management from unauthorized access. The chassis at the Central Office requires only a single IP address to manage itself and all of the connected remote chassis managed by the Remote OAM channel. This is the ideal configuration for networks that separate secure management traffic from the service (customer) traffic on different networks, or when management IP addresses are at a premium.

# SPECIFICATIONS

<b>Description</b>	100BASE-FX SFP to 100BASE-FX SFP Media Converter and Network Interface Device
<b>Protocols</b>	100BASE-FX with 2048 bytes max. frame size
<b>Fiber Cables</b>	Multimode: 50/125, 62.5/125, 100/140µm Single-mode: 9/125µm
<b>Serial Cable</b>	RS-232, 22 to 24 AWG, 12 to 50 pF/ft.
<b>Fiber Connectors</b>	Small Form Pluggable (SFP)
<b>Serial</b>	Mini DIN-6 female, mini DIN-6 male to DB-9 female adapter included
<b>Controls</b>	DIP-Switches and LEDs
<b>DC Power</b>	Plug-In Module: 1.2A @ 3.3VDC Standalone: 8-15VDC, 0.6A @ 9VDC
<b>DC Power Connector</b>	Plug-In: Power supplied by backplane Standalone: 2.5mm Barrel Connector or Field-wireable Terminal Connector
<b>AC Power Adapter [US]</b>	Plug-In Module: N/A Standalone: 100-120VAC/60Hz 0.08A @ 120VAC
<b>AC Power Adapter [Universal]</b>	Plug-In Module: N/A Standalone: 100-240VAC/50-60Hz 0.08A @ 120VAC
<b>Dimensions</b>	Plug-In Module: W:0.85" x D:4.5" x H:2.8" Standalone: W:3.1" x D:4.8" x H:1.0" Wallmount: W:3.8" x D:4.8" x H:1.0"
<b>Weight without power adapter</b>	Plug-In Module: 8oz. Standalone: 1 lb.
<b>Weight with power adapter</b>	Plug-In Module: N/A Standalone: 1.5 lb.
<b>Compliance</b>	UL, CE, FCC Class A, MEF 9, MEF 14
<b>IP-Based Management</b>	Telnet, SNMPv1, SNMPv2c, SNMPv3
<b>Temperature</b>	Standard Operating: 0 to 50° C Wide Operating: -40 to 60° C Extended Operating: -40 to 75° C Storage: -40 to 80° C
<b>Humidity</b>	5% to 95% (non-condensing)
<b>Altitude</b>	-100m to 4000m (Operational)
<b>MTBF (Hours)</b>	Plug-In Module: 500,000 Standalone without Power Adapter: 500,000 Standalone With Power Adapter: 250,000

# ORDERING INFORMATION

8 9 5 9 N - 0 - x x

<Blank>	Plug-In Module
A	Tabletop with External US AC Power Supply
B	Tabletop with External Universal AC Power Supply
C	Tabletop with DC Terminal Power
D	Wall-Mount with External US AC Power Supply
E	Wall-Mount with External Universal AC Power Supply
F	Wall-Mount with DC Terminal Power

<Blank>	Standard Operating Temperature Range Model
W	Wide Operating Temperature Range Model
Z	Extended Operating Temperature Range Model

SFP Ordering Information										
Fiber Type	Distance	Model Number	Tx Wavelength [nm]	Rx Wavelength [nm]	Min. Tx Power [dBm]	Max. Tx Power [dBm]	Min. Rx Sense [dBm]	Max. Rx Power [dBm]	Min. Attenuation (dBm)	Link Budget (dB)
<b>Fast Ethernet</b>										
MM	5km	7006-0	1310	1310	-24	-14	-31	-14	-	7
SM	30km	7007-1	1310	1310	-15	-8	-31	-8	-	16
SM-SF	30km	7014-1	1310	1550	-15	-5	-30	-3	-	15
SM-SF	30km	7015-1	1550	1310	-15	-5	-30	-3	-	15
SM-SF	50km	7014-2	1310	1550	-8	0	-30	-3	3	22
SM-SF	50km	7015-2	1550	1310	-8	0	-30	-3	3	22

\*See the SFP data sheet (091-17000-001) for other supported transceiver models.

For more information on the variety of SFPs available, visit Omnitron's web site at: [www.omnitron-systems.com](http://www.omnitron-systems.com)