

iConverter® 4Tx **4-Port 10/100BASE-T Managed Ethernet Switch**

The iConverter 4Tx is a compact 4-Port Ethernet switch module and is a member of the managed iConverter product family. The 4Tx is a versatile plug-in switch module that can be deployed in a 19-Module, 5-Module, 2-Module and in a 1-Module Chassis.

The 4Tx supports Half or Full-duplex 10/100Mbps auto-negotiation, and features flexible hardware and software controls. Two ports can be controlled by DIP-switches and all the four ports can be controlled via SNMP management.

The 4Tx supports RJ-45 auto-crossover (MDI/MDI-X) on three of the four ports, eliminating the need for a crossover cable and facilitating connectivity to different types of Ethernet equipment. Port 1 features a manual crossover switch.


The 4Tx features Port VLAN control on the RJ-45 and Backplane Ports, which allows complete control of traffic flow between ports. The switch module also supports Port Access Control to enable/disable individual RJ-45 ports. MIB statistics are available for 32 variables per port, reporting a wide range of real-time packet statistics such as performance and operational status indicators.

The iConverter 4Tx can be used in managed or unmanaged applications. Management is accomplished by installing an iConverter Management Module (NMM2) or Network Interface Device (NID) in the same chassis. The management module provides access to all the advanced features available on the module.

The management software can override the physical DIP-switch settings such as auto-negotiation, Half or Full-Duplex and backplane selection, and remotely configure additional parameters including Port VLAN and Port Access Control. The port MIB statistics include transmit and receive packet counts and error counts.

The hot-swappable plug-in module can be mounted in a high-density 19 or 5-Module chassis with redundant AC and DC power supplies. It can also be mounted in a 2-Module AC or DC powered chassis, or in a 1-Module chassis with AC or DC power input.

The iConverter Multi-Service Platform consists of Network Interface Devices, T1/E1 multiplexers, CWDM/DWDM multiplexers and managed media converters that combine to deliver Carrier Ethernet and TDM services over fiber or CWDM/DWDM wavelengths. This flexible architecture supports a wide variety of configurations for scalable and reliable fiber connectivity in Service Provider and Enterprise networks.

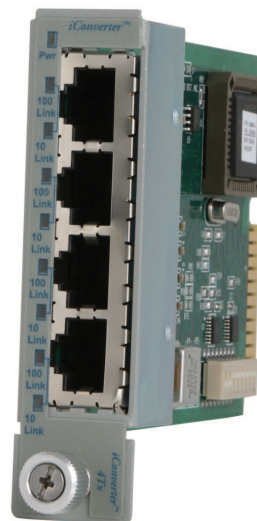

KEY FEATURES

- 4-Port 10/100BASE-T Ethernet switch module
- Conforms to IEEE 802.3, 10BASE-T and 100BASE-TX specifications
- Port VLAN, Port Access Control and MIB Statistics
- Supports Half or Full-Duplex and auto-negotiation
- RJ-45 crossover support eliminates need for different cables in connecting to various devices
- 100Mbps Ethernet backplane ports for connectivity to adjacent modules
- Multiple 4Tx modules can be installed in the same chassis for high-density port configurations
- Module is hot-swappable in 19-Module, 5-Module, 2-Module or 1-Module chassis
- Management is available with the addition of a management module to the chassis
- SNMP management via NetOutlook® provides real-time port and module status information, remote parameter configuration and trap notification
- Commercial (0 to 50°C), wide (-40° to 60°C) and extended (-40° to 75°C) temperature ranges
- TAA, BAA and NDAA compliant, and Made in the USA
- Lifetime Warranty and free 24/7 Technical Support

SPECIFICATIONS

Description	<i>iConverter</i> 4Tx 4-Port 10/100BASE-T Copper Switch	
Standard Compliances	IEEE 802.3	
Regulatory Compliances	Safety: EMI: ACT:	UL, cUL, CE, UKCA FCC Class A TAA, BAA, NDAA
Environmental	RoHS, WEEE, REACH	
Frame Size	Up to 1,536 bytes	
Port Types	Copper:	10/100BASE-T (RJ-45)
Cable Types	Copper:	EIA/TIA 568A/B, Cat 5 UTP and higher
DC Power Requirements	DC Input: (Backplane)	3.3VDC, 0.9A @ 3.3VDC
Dimensions W x D x H	0.85" x 4.5" x 2.8" (21.6 mm x 114.3 mm x 71.1 mm)	
Weight	8 oz. (226.8 grams)	
Temperature	Commercial: Wide: Extended: Storage:	0 to 50°C -40 to 60°C -40 to 75°C -40 to 80°C
Humidity	5 to 95% (non-condensing)	
Altitude	-100m to 4,000m	
MTBF (hrs)	910,000	
Warranty	Lifetime warranty and 24/7/365 free Technical Support	

SWITCH CONFIGURATIONS

iConverter compact chassis support Ethernet backplane connectivity between plug-in modules. Modules can be combined to create configurations that provide multi-port Ethernet connectivity to end users and subscribers.

The example below illustrates a 4Tx module and a 10/100M2 intelligent media converter installed in a 2-Module chassis. This configuration provides a Fast Ethernet fiber uplink and five managed 10/100BASE-T ports.



ORDERING INFORMATION

Step 1: Choose a Base Part Number (xxxx-xt)

Model Number	Description
8480-4t	4-Port 10/100BASE-T Copper Switch
Contact Omnitron for other configurations and RoHS (5/6) compliant models. For chassis options, see iConverter Chassis and Mounting Options web page .	

Step 2: Choose an Operating Temperature Range (xxxx-xt)

<leave blank> = Commercial temperature (0 to 50°C)
W = Wide temperature (-40 to 60°C)
Z = Extended temperature (-40 to 75°C)

© 2024 Omnitron Systems Technology, Inc. All rights reserved. *iConverter* and *NetOutlook* are Registered Trademarks of Omnitron Systems Technology, Inc. Trademarks are owned by their respective companies. Specifications are subject to change without notice.

